

## Pneumatic Stapler Type 246/110-851E

The BeA 246/110-851E is a heavy duty wide crown stapler and drives staples of type 246 in the lengths from 50 to 110 mm. It is well-suited for planking wooden outside frames with wood fibre boards, wood wool sandwich board, styrofoam etc. The tool has been technically optimized for the requirement of pre-fab building as well as for conventional construction sites. The comfortable rubber grip and the attached exhaust make this well-balanced tool operator friendly. The tool is equipped with a quick release attachment.

**BeA 246/100-851 C** with contact actuation for staples type 246 from 50 to 100 mm.



### Popular applications:

Wood fibre boards for wooden outside frames, wood wool sandwich board, Styrofoam etc.

Length: 406 mm  
Width: 142 mm  
Height: 397 mm

### Technical data

Type description:	<b>246/110-851E Single</b>	<b>246/100-851C Contact</b>
Article code:	12000463	12000477
Magazine type :	Top loader	Top loader
Safety:	Single actuation	Contact actuation
Fastener type:	Type 246	Type 246
Magazine capacity:	120	120
Fasteners per strip:	2 x 51	2 x 51
Operating pressure:	6 – 8 bar	6 – 8 bar
Max. operating pressure:	8 bar	8 bar
Air consumption/operation:	3.4 liters / 6 bar	3.4 liters / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d = 92 dB	L pA, 1s, d = 92 dB
Single-shot emission sound pressure level:	L WA, 1 s,d = 99 dB	L WA, 1 s,d = 99 dB
Weight:	5.0 kg	5.1 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is 4.5 m/s<sup>2</sup>.

**Extras supplied with the nailer:** Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modifications.

### Accessories:

Article code	Description
14407208	Balancer Eye

All BeA pneumatic tools can be jig-mounted  
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive  
for Machinery (89/392 EWG)

Product leaflet 851E


## Pneumatic Stapler Type 246/110-851E

### Staples type 246



BeA Deutschland  
Befestigungstechnik  
P.O.Box 14 80  
D-22904 Ahrensburg  
Phone: (04102) 78-0  
Fax: (04102) 78-250  
www.bea-group.com  
e-mail: [info@bea-group.com](mailto:info@bea-group.com)

a division of  
Joh. Friedrich Behrens AG

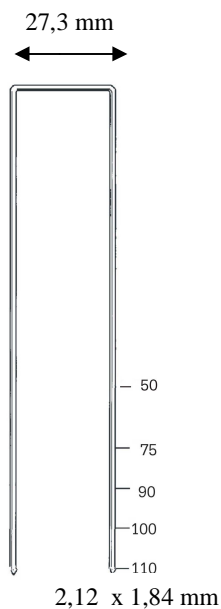

Description	L = Length mm
246/ 75 VZ HZ	75
246/ 90 VZ HZ	90
246/100 VZ HZ	100

Other lengths and finishes are also available on request.

#### Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut