

Pneumatic Tacker Type 14/40-713

The BeA 14/40-713 is a well balanced tool, that operates quietly and efficiently while driving staples type 14 from 18 to 40mm. The tool has the power to drive longer length staples type 14 in problematic, harder to penetrate materials. The compact design allows the tool to be used even in hard to reach areas. The narrow nose of the 14/40-713 tool affords better operator visibility for more precise fastener placement.



Popular applications:

Crates, pallets, manufactured housing, box building, wall and roof sheathing, sub-flooring, furniture.

| | |
|---------|--------|
| Length: | 221 mm |
| Width: | 70 mm |
| Height: | 228 mm |

Technical data

| | |
|---|-----------------------------|
| Type description: | 14/40-713 Contact |
| Article code: | 12000237 |
| Magazine type : | Top loader |
| Safety: | Contact actuation |
| Fastener type: | Type 14 / type 155 |
| Magazine capacity: | 110 / 102 |
| Fasteners per strip: | 1 x 75 / 1 x 70 |
| Operating pressure: | 5 – 8 bar |
| Max. operating pressure: | 8 bar |
| Air consumption/operation: | 1,0 litre / 6 bar |
| Inner hose diameter: | Ø 9 mm LW recommended |
| Emission sound pressure level at the workstation: | L pA, 1s, d= 82 dB |
| Single-shot emission sound pressure level: | L WA, 1 s,d= 91 dB |
| Weight: | 2,2 kg |

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is 3,0 m/s²

Extras supplied with the nailer: Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modifications.

Accessories:

| Articel code | Description |
|--------------|----------------------|
| 14406199 | Single actuation set |
| 14403421 | Remote valve |
| 14403536 | Mounting flange |

All BeA pneumatic tools can be jig-mounted
We supply the necessary accessories and equipments.




This tool conforms to the EG Directive
for Machinery (89/392 EWG)

Pneumatic Tacker Type 14/40-713

Staples type 14 and type 155



BeA Deutschland
Befestigungstechnik GmbH
P.O.Box 14 80
D-22904 Ahrensburg
Phone: (04102) 78-0
Fax: (04102) 78-250
www.bea-group.com
e-mail: info@bea-group.com

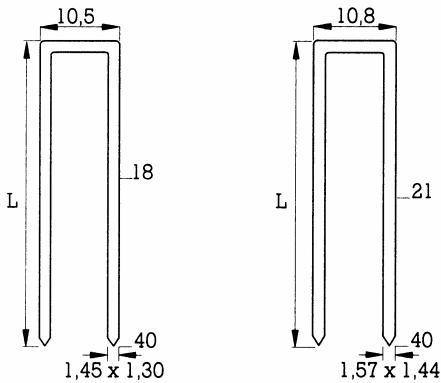

| Description | L = Length mm |
|-------------|------------------|
| 14/18 NK HZ | 18 |
| 14/21 NK HZ | 21 |
| 14/25 NK HZ | 25 |
| 14/28 NK HZ | 28 |
| 14/30 NK HZ | 30 |
| 14/32 NK HZ | 32 |
| 14/35 NK HZ | 35 |
| 14/38 NK HZ | 38 |
| 14/40 NK HZ | 40 |

| | |
|--------------|----|
| 155/21 NK HZ | 21 |
| 155/25 NK HZ | 25 |
| 155/28 NK HZ | 28 |
| 155/30 NK HZ | 30 |
| 155/32 NK HZ | 32 |
| 155/35 NK HZ | 35 |
| 155/38 NK HZ | 38 |
| 155/40 NK HZ | 40 |

Other lengths and finishes are also available on request.

Explanations:

| | | | |
|------------------------------------|--------------------------------|--|----------------------|
| NK = galvanized steel | BK = bright steel | LM = aluminium | HZ = resin coated |
| NKS = galvanized steel, extra hard | BKS = bright steel, extra hard | NR = stainless steel, material. 1.4401 | DP = divergent point |
| NKH = galvanized steel, hard | MS = brass | RF = rust resistant, material 1.4301 | SA = step cut |