

Pneumatic Stapler Type 180/65-805

The BeA 180/65-805 is constructed for a variety of applications in industrial use. This stapler is especially designed for strong, long-lasting fastened connections. The stapler drives staples type 180 in lengths from 40 to 65 mm.



Popular applications:

Boxes, pallets, roofing, framing, wood foundations, prefabricated houses.

Length: 346,5 mm
Width: 93 mm
Height: 297 mm

Technical data

Type description:	180/65-805 Standard	180/65-805 G Single
Article code:	12000268	12000270
Magazine type :	Top loader	Top loader
Safety:	Contact actuation	Single actuation
Fastener type:	Type 180	Type 180
Magazine capacity:	122	122
Fasteners per strip:	2 x 60 (VZHZ = 3 x 40)	2 x 60 (VZHZ = 3 x 40)
Operating pressure:	5 – 8 bar	5 – 8 bar
Max. operating pressure:	8 bar	8 bar
Air consumption/operation:	2.2 litre / 6 bar	2.2 litre / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 90 dB	L pA, 1s, d= 90 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 98 dB	L WA, 1 s,d= 98 dB
Weight:	3.15 kg	3.25 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is 3.6 m/s²

Extras supplied with the nailer: Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modifications.

Accessories:

Articel code	Description
14404669	Balancer Eye
14405272	Single actuation set
14403415	Remote valve
14403514	Mounting flange

All BeA pneumatic tools can be jig-mounted
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive
for Machinery (89/392 EWG)

Product leaflet 805


Pneumatic Stapler Type 180/65-805

Staples type 180



BeA Deutschland
Befestigungstechnik
P.O.Box 14 80
D-22904 Ahrensburg
Phone: (04102) 78-0
Fax: (04102) 78-250
www.bea-group.com
e-mail: info@bea-group.com

a division of
Joh. Friedrich Behrens AG

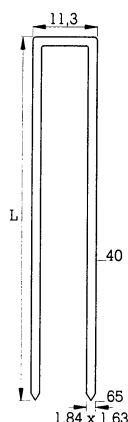

Description	L = Length mm
180/40 NK HZ	40
180/45 NK HZ	45
180/50 NK HZ	50
180/55 NK HZ	55
180/60 NK HZ	60
180/63 NK HZ	63
180/65 NK HZ	65

Staples type 180 are also available certified to DIN 1052 (VZ HZ + NR HZ)

Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
VZ = heavy galvanized steel	MS = brass	RF = rust resistant, material 1.4301	SA = step cut