

Pneumatic Nailer Type R 130-958 E

The BeA R 130-958 E is a powerful tool and drives full round strip nails with diameter 3.1 to 4.2 mm in the lengths from 80 to 130 mm. The lock-out mechanism prevents the tool from operating, if there are fewer than four nails in the magazine. The tool can be reloaded easily with one hand. The comfortable rubber grip and the second handgrip make the tool operator friendly.



Popular applications:

Roofing, framing, truss building, sheathing, sub-flooring, pallets, crate assembling, prefabricated building construction

Length: 530 mm
Width: 145 mm
Height: 440 mm

Technical data

Type description:	R 130-958 E Standard
Article code:	12100348
Magazine type :	Top loader
Safety:	Single actuation
Fastener type:	Type R 20
Magazine capacity:	65
Fasteners per strip:	2 x 25 or 2 x 30
Operating pressure:	5 – 8 bar
Max. operating pressure:	8 bar
Air consumption/operation:	7 litre / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 91 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 98 dB
Weight:	5.9 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is 6.1 m/s²

Extras supplied with the nailer: Operating instructions, spare parts list, service instructions, silencer

Subject to technical modifications.

All BeA pneumatic tools can be jig-mounted
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive
for Machinery (89/392 EWG)


Pneumatic Nailer Type R 130-958 E



BeA Deutschland
Befestigungstechnik
P.O.Box 14 80
D-22904 Ahrensburg
Phone: +49 (0) 4102 78-0
Fax: +49 (0) 4102 78-250
www.bea-group.com
e-mail: info@bea-group.com

a division of
Joh. Friedrich Behrens AG

R 20 strip nails

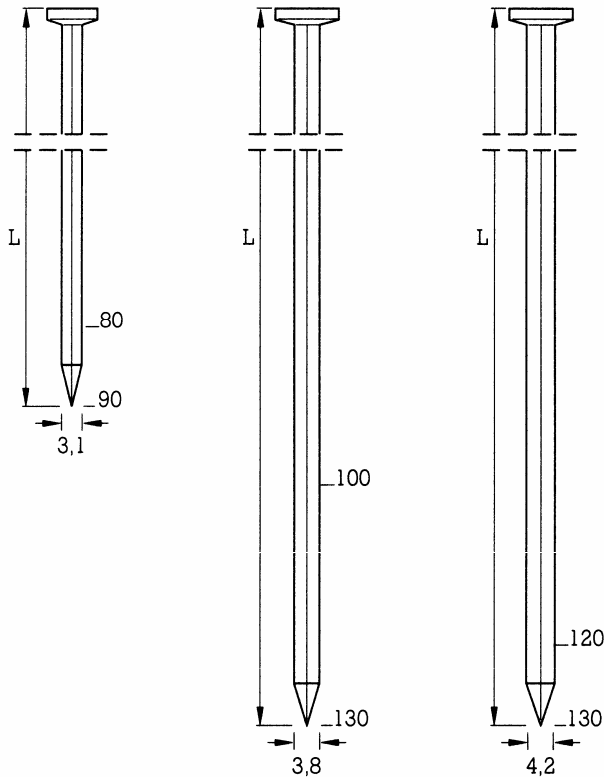

Description	L = Length mm
R20 3,1 x 80 BK	80
R20 3,1 x 90 BK	90
R20 3,8 x 100 BK	100
R20 3,8 x 110 BK	110
R20 3,8 x 120 BK	120
R20 3,8 x 130 BK	130
R20 4,2 x 120 BK	120
R20 4,2 x 130 BK	130

Other lengths and finishes are also available on request.

Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut