

## Pneumatic Nailer Type 566 DC

This compact and powerful tool drives wire welded nails in the lengths of 45 – 65 mm as well as plastic sheet collated nails in the length of 32 – 65 mm without any adjustment. The nailer is equipped with an adjustment for depth control and comes with a patented anti-double fire mechanism. The comfortable rubber grip and the adjustable exhaust make the tool operator friendly.



### Popular applications:

Fixing plaster boards and other building boards, exterior trim, pallets, boxes, cases.

Length: 273 mm  
Width 130 mm  
Height: 320 mm

### Technical data

Type description:	<b>566 DC</b>
Article code:	12100183
Magazine type :	Coil magazine / top loader
Safety:	Contact actuation
Fastener type:	BDC / TC
Magazine capacity:	350
Nails per coil:	Ø 2,1 / Ø 2,2=350 / Ø 2,3=334 / Ø 2,4=350 / Ø 2,5=300/334
Operating pressure:	5 – 7 bar
Max. operating pressure:	7 bar
Air consumption/operation:	1.37 litre / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 84 dB
Single-shot emission sound pressure level:	L WA, 1 s, d= 96 dB
Weight:	2.2 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is 5.22 m/s²

**Extras supplied with the nailer:** Operating instructions, spare parts list, service instructions  
For safety reasons we recommend the BeA single release if working pressure allows this.

Subject to technical modifications.

### Accessories:

Article code	Description
14504726	Single actuation set
14504723	Nailer hanging, compl.

All BeA pneumatic tools can be jig-mounted  
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive  
for Machinery (89/392 EWG)


## Pneumatic Nailer Type 566 DC



BeA Deutschland  
Befestigungstechnik  
P.O.Box 14 80  
D-22904 Ahrensburg  
Phone: +49 (0) 4102 78-0  
Fax: +49 (0) 4102 78-250  
www.bea-group.com  
e-mail: [info@bea-group.com](mailto:info@bea-group.com)


a division of  
Joh. Friedrich Behrens AG

### Collated nails BDC 16° wire welded nails

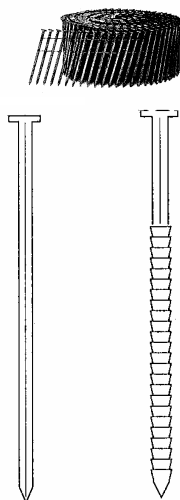

Nail shank: Ø 2.1 – 2.5 mm  
Length: 45 – 65 mm

### Nails type TC Plastic sheet collated nails

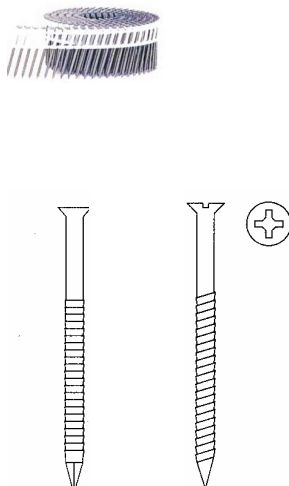

Nail shank: Ø 2.2 – 2.5 mm  
Length: 32 – 65 mm

Description	L = Length mm
BDC 2,1 x 45 – 50 BK	45 - 50
BDC 2,1 x 45 – 50 BK Ring	45 – 50
BDC 2,1 x 45 - 50 NK Ring *	45 - 50
BDC 2,3 x 50 - 55 BK Ring	50 - 55
BDC 2,5 x 45 – 65 BK	45 - 65
BDC 2,5 x 45 – 65 BK Ring *	45 - 65
BDC 2,5 x 65 NK	65
BDC 2,5 x 45 – 65 NK Ring *	45 - 65
BDC LK 2,5 x 55 – 65 NR Ring*	55 - 65

### Plasterboard nails :

TC-NG-GK 2,2 x 35 – 45 NK Ring *	35 - 45
TC-NG-GK 2,5 x 35 – 40 NK Ring *	35 - 40

### Nail screws with cross recessed head:

TC-NG 2,5 x 35 – 50 NK Pozi	35 – 50
-----------------------------	---------

\*) Nails certified to DIN 1052 Part 2

### Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut