

Pneumatic Stapler Type 14/40-723

The BeA 14/40-723 is a well balanced tool, that operates quietly and efficiently while driving staples type 14 and 16 (155) from 18 to 40 mm. The tool has the power to drive longer length staples type 14 in problematic, harder to penetrate materials. The compact design allows the tool to be used even in hard to reach areas. The narrow nose of the 14/40-723 tool affords better operator visibility for more precise fastener placement.



Popular applications:

Crates, pallets, manufactured housing, box building, wall and roof sheathing, sub-flooring, furniture.

Length: 334 mm
Width: 70 mm
Height: 228 mm

Technical data

Type description:	14/40-723 Contact	14/40-723 Single
Article code:	12000344	12000410
Magazine type :	Top loader	Top loader
Safety:	Contact actuation	Single actuation
Fastener type:	Type 14 / type 155	Type 14 / type 155
Magazine capacity:	159 / 149	159 / 149
Fasteners per strip:	2 x 75 / 2 x 70	2 x 75 / 2 x 70
Operating pressure:	5 – 8 bar	5 – 8 bar
Max. operating pressure:	8 bar	8 bar
Air consumption/operation:	1,0 litre / 6 bar	1,0 litre / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 82 dB	L pA, 1s, d= 82 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 91 dB	L WA, 1 s,d= 91 dB
Weight:	2,14 kg	2,14 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is 4,1 m/s²

Extras supplied with the nailer:

Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modifications.

Accessories:

Articel code	Description
14406199	Single actuation set
14403421	Remote valve
14403536	Mounting flange
14400992	Attachment for board with Smooth edges
14400921	Guide plate with high-adjustable stop
14400887	Spring-clip attachment
14400888	Rapid-clip attachment

All BeA pneumatic tools can be jig-mounted
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive
for Machinery (89/392 EWG)


Pneumatic Stapler Type 14/40-723

Staples type 14 and type 155



BeA Deutschland
Befestigungstechnik
P.O.Box 14 80
D-22904 Ahrensburg
Phone: (04102) 78-0
Fax: (04102) 78-250
www.bea-group.com
e-mail: info@bea-group.com

a division of
Joh. Friedrich Behrens AG

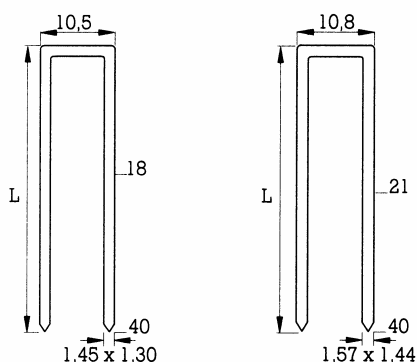

Description	L = Length mm
14/18 NK HZ	18
14/21 NK HZ	21
14/25 NK HZ	25
14/28 NK HZ	28
14/30 NK HZ	30
14/32 NK HZ	32
14/35 NK HZ	35
14/38 NK HZ	38
14/40 NK HZ	40

155/21 NK HZ	21
16/25 NK HZ (155/25)	25
16/28 NK HZ (155/28)	28
16/30 NK HZ (155/30)	30
16/32 NK HZ (155/32)	32
16/35 NK HZ (155/35)	35
16/38 NK HZ (155/38)	38
16/40 NK HZ (155/40)	40

Other lengths and finishes are also available on request.

Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut