


Pneumatic Nailer Type R 60-944 E

The BeA anchoring nailer R60 – 944 drives anchoring nails in the lengths of 40 – 60 mm. The projecting head of the anchoring nails makes it easier to meet the holes in the perforated plates. The low weight of the tool and the ergonomic design reduces the working fatigue. The tool is equipped with a single actuation and is sound insulated and vibration damped.

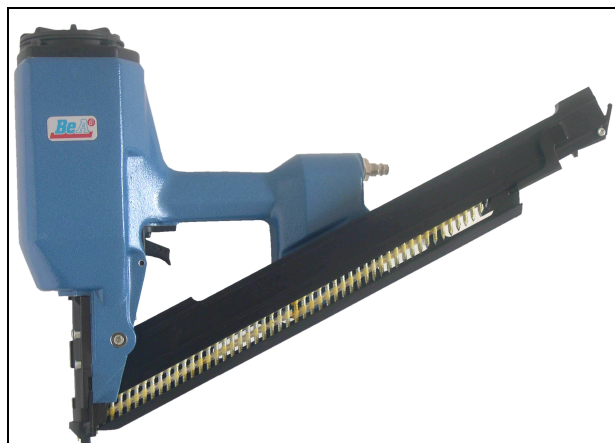

Popular applications:

Wood-working industry, pre-fabricated housing, garden sheds, for the nailing of timber connectors and perforated plates.

Length: 525 mm

Height: 345 mm

Technical data

Type description:	R 90-944 E
Article code:	12100247
Magazine type :	Top loader
Safety:	Single actuation
Fastener type:	R 20 anchoring nails
Magazine capacity:	approx. 55
Fasteners per strip:	2 x 25
Operating pressure:	5 – 8.5 bar
Max. operating pressure:	8.5 bar
Air consumption/operation:	2.8 litre / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 94 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 107 dB
Weight:	4.1 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is 3.0 m/s²

Extras supplied with the nailer: Operating instructions, spare parts list, service instructions

Subject to technical modifications.

All BeA pneumatic tools can be jig-mounted
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive
for Machinery (89/392 EWG)

Pneumatic Nailer Type R 60-944 E

Full round head strip anchoring nails



BeA Deutschland
Befestigungstechnik GmbH
P.O.Box 14 80
D-22904 Ahrensburg
Phone: (04102) 78-0
Fax: (04102) 78-250
www.bea-group.com
e-mail: info@bea-group.com



- 60 mm

Description	L = Length mm
R 20 4,0 x 40 NK Ring*	40
R 20 4,0 x 50 NK Ring*	50
R 20 4,0 x 60 NK Ring*	60

* Nails certified to DIN 1052 Part 2



Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut