


Pneumatic Stapler Type 145/32-178

The compact and well-balanced tool drives staples type 140 in the length from 14 to 30 mm. The top magazine can hold up to 165 staples. The 145/32-178 has a shoe type work contact. This shoe distributes pressure on the material being stapled through, which is ideal for exterior lathing. The tool is well suited to stapling corrugated boxes to skids.

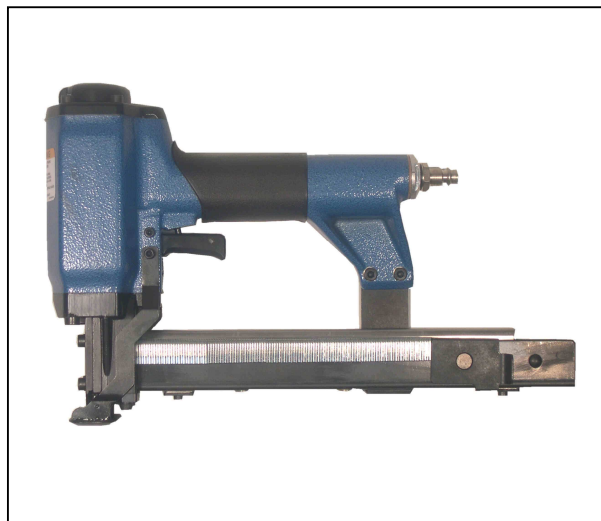

Popular applications:

Exterior lathing, installing roof shingles, corrugated boxes to pallets.

Length: 349 mm
Width: 70 mm
Height: 224 mm

Technical data

Type description:	145/32-178 Contact
Article code:	12000194
Magazine type :	Top loader
Safety:	Contact actuation
Fastener type:	Type 140
Magazine capacity:	165
Fasteners per strip:	3 x 50
Operating pressure:	6 – 8 bar
Max. operating pressure:	8 bar
Air consumption/operation:	1.0 litre / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 85 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 91 dB
Weight:	1,4 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is 3,4 m/s².

Extras supplied with the nailer:	Operating instructions, spare parts list, service instructions, silencer.
	Subject to technical modifications.

Accessories:

Article code	Description
14406201	Single actuation set
14403405	Remote valve


BeA pneumatic tools can be jig-mounted
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive
for Machinery (89/392 EWG)

Pneumatic Stapler Type 145/32-178

Staples type 140



BeA Deutschland
Befestigungstechnik
P.O.Box 14 80
D-22904 Ahrensburg
Phone: +49 (0) 4102 78-0
Fax: +49 (0) 4102 78-250
www.bea-group.com
e-mail: info@bea-group.com

a division of
Joh. Friedrich Behrens AG

Description	L = Length mm
140/14 NK HZ	14
140/16 NK HZ	16
140/19 NK HZ	19
140/22 NK HZ	22
140/25 NK HZ	25
140/30 NK HZ	30

Staples type 145 (wire diameter 1,57 x 1,44 mm) are also available on request

Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut