


Pneumatic Stapler Type 74/16-404

The light but powerful stapler of the 400 series takes narrow staples type 74 in leg lengths from 4 mm to 16 mm.

The low air consumption, long service life and ease of maintenance of this stapler make it a real cost saver. The bottom loading magazine allows easy and quick loading. Further features are the ergonomic design and the integrated silencer. This is a versatile tool for industry and the craftsman.

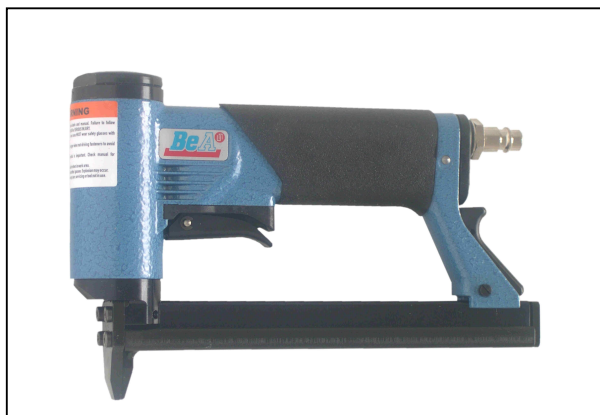

Popular applications:

Upholstered furniture, cabinets, toy manufacturing, wicker work, light wooden products, picture frames, shoe repair

Length: 211 mm
Width: 40 mm
Height: 141 mm

Technical data

Type description:	74/16-404 Standard
Article code:	12000042
Magazine type :	Bottom loader
Safety:	Type 74
Fastener type:	190
Magazine capacity:	1 x 125
Fasteners per strip:	5 – 6 bar
Operating pressure:	6 bar
Max. operating pressure:	0.3 litres / 6 bar
Air consumption/operation:	Ø 9 mm LW recommended
Inner hose diameter:	L pA, 1s, d= 82 dB
Emission sound pressure level at the workstation:	L WA, 1 s,d= 87 dB
Single-shot emission sound pressure level:	0.9 kg
Weight:	

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is under the declaration limit as per EN 292-1, amendment A.

Extras supplied with the stapler: Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modifications.

Accessories:

Article code	Description
14400827	Adjustable roller edge guide (assembly in factory)
14400834	Adjustable roller edge guide (assembly in factory)
14400862	Roller edge guide, resilient (assembly in factory)
14400870	Sole attachment
14403535	Mounting flange
14403330	Remote valve, complete
14400590	Screw cap with hanger
14400674	Screw cap, Alu


All BeA pneumatic tools can be jig-mounted
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive
for Machinery (89/392 EWG)

Pneumatic Stapler Type 74/16-404

Staples type 74



BeA Deutschland
Befestigungstechnik
P.O.Box 14 80
D-22904 Ahrensburg
Phone: (04102) 78-0
Fax: (04102) 78-250
www.bea-group.com
e-mail: info@bea-group.com

a division of
Joh. Friedrich Behrens AG

Description	L = Length mm
74/06 NK	6
74/08 NK	8
74/10 NK	10
74/12 NK	12
74/14 NK	14
74/16 NK	16

74/12 NK schwarz	12
74/14 NK schwarz	14

Other lengths and finishes are also available on request.

Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut