

Pneumatic Stapler Type 146/80-159 C

The BeA 146/80-159 C is constructed for a variety of applications in industrial use. This stapler is especially designed for strong, long-lasting fastened connections. The stapler drives staples type 146 in lengths from 50 to 80 mm. It is well suited for fastening insulating on wooden materials.

The comfortable rubber grip and the attached exhaust make this well-balanced tool operator friendly.



Popular applications:

Wooden outside frames, prefabricated houses.

Length: 443 mm
Width: 70 mm
Height: 334 mm

Technical data

Type description:	146/80-159 C Standard
Article code:	12200061
Magazine type :	Top loader
Safety:	Contact actuation
Fastener type:	Type 146
Magazine capacity:	150 minimum
Fasteners per strip:	2 x 69
Operating pressure:	6 – 8 bar
Max. operating pressure:	8 bar
Air consumption/operation:	1.5 Litre
Inner hose diameter:	Ø 9 mm LW
Emission sound pressure level at the workstation:	L pA, 1s, d= 79 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 87 dB
Weight:	3 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is 4 m/s².

Extras supplied with the nailer: Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modifications.

All BeA pneumatic tools can be jig-mounted
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive
for Machinery (89/392 EWG)

Product leaflet 159 C


Pneumatic Stapler Type 146/80-159 C

Staples type 146



BeA Deutschland
Befestigungstechnik
P.O.Box 14 80
D-22904 Ahrensburg
Phone: +49 (0) 4102 78-0
Fax: +49 (0) 4102 78-250
www.bea-group.com
e-mail: info@bea-group.com

a division of
Joh. Friedrich Behrens AG

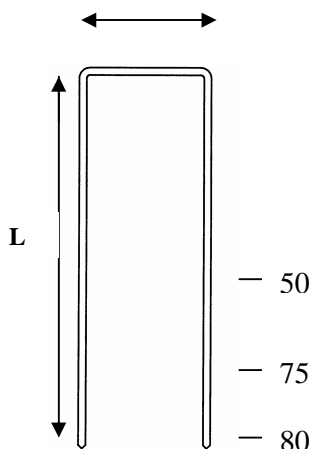

Description	L = Length mm
146 / 50 NK HZ	50
146 / 75 VZ HZ	75
146 / 80 VZ HZ	80

Other lengths and finishes are also available on request.

Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
VZ = heavy galvanized steel	MS = brass	RF = rust resistant, material 1.4301	SA = step cut